

GMK VS Vacuum cup


Construction width	1,34 m
Dead weight	89 kg
Transport position length	2,31 m
Max. Basket load / Lifting load	600 kg
Special features	Dual-circuit vacuum system, 12 V battery, appliance depth min. 150 mm, manual rotation through 360° (engages every 90°), tilting without grid, variable use with 4 to 8 suction plates, complies with DIN EN 13155


**Saugplattenanordnung
/ Arrangement of suction plates**

Die Saugplatten dürfen nur wie nachstehende Bilder zeigen montiert werden, um das Zweikreisssystem nicht außer Kraft zu setzen.


The suction plates must be mounted as shown in the following images. This is to prevent a shutdown of the two-circuit system.

Traglast / Max. load: 300 kg

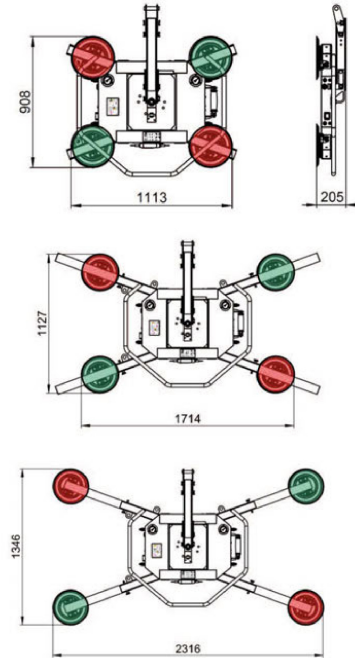

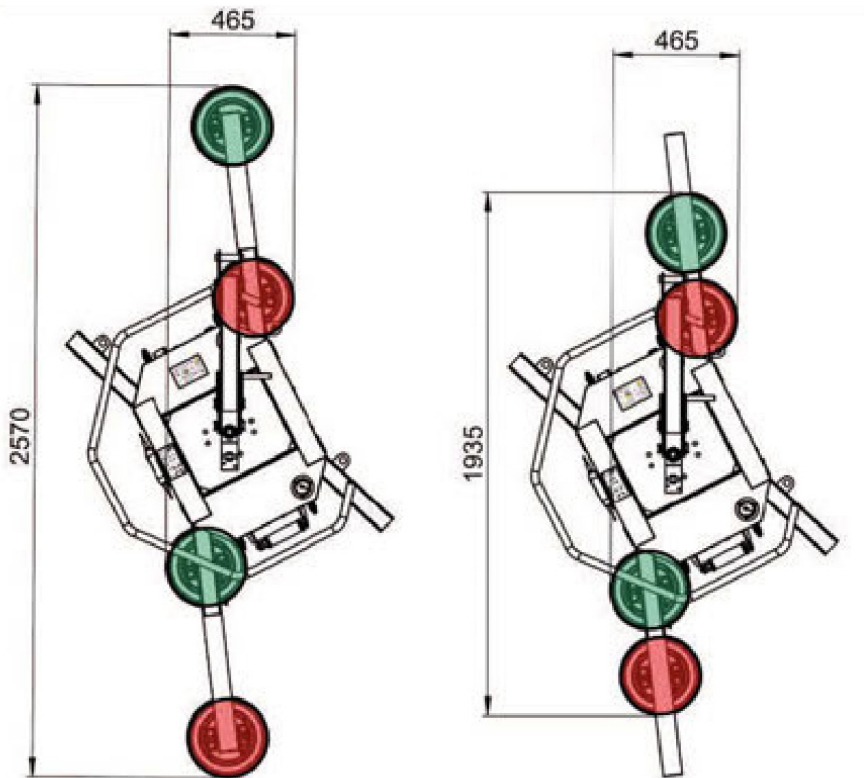

Traglast / Max. load: 450 kg

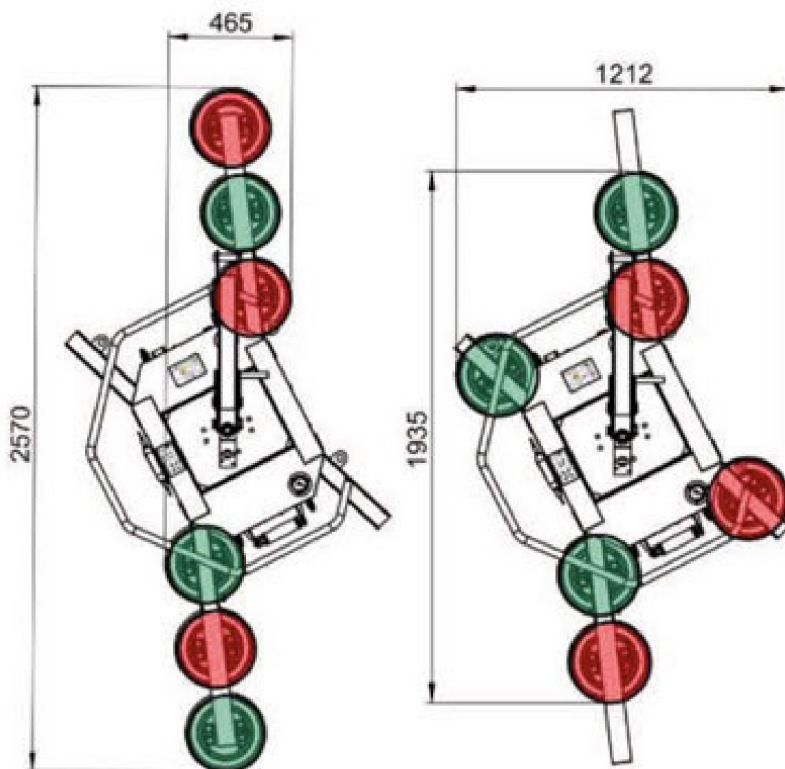

Traglast / Max. load: 600 kg

