


GT 431-25 AkLRG

Max. Working height	43,11 m
Movable up to working height	43,11 m
Max. Pitch angle	35 %
Four-wheel drive	ja
Drive type	Diesel
Non-Marking	no
Overall dimensions LxWxH	20.28 x 2.50 x 3.08 m
Transport position length	13,10 m
Construction width	2,50 m
Transport position height	3,08 m
Ground clearance	0,37 m
Surplus	1,71 m
Dead weight	21664 kg
Track widening	3,98 m
Platform dimensions WxD	2.44 x 0.92 m
Max. Basket load / Lifting load	454 kg
Swing axle	no
Soot particle filter	ja
Basket arm	ja
Swivel range	360°
Rotating work basket	ja
Max. lateral reach	28,30 m
Special features	Extremely long lateral reach, high cage load, ideal working diagram thanks to the 9.14 meter long cage boom, narrow platform in relation to the working height, active protection system against clamping accidents

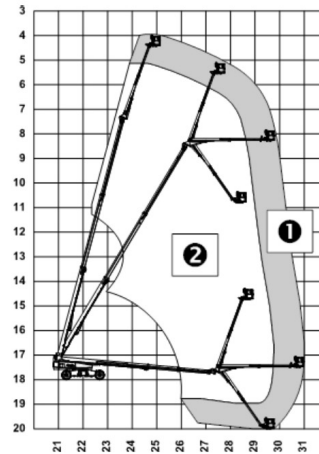

Maximale Plattformtragfähigkeit

- 1 660 lb/300 kg
- 2 1 000 lb/454 kg

Max. Höhe			Max. Reichweite		
3	150 ft	45,72 m	21	-10 ft	-3,05 m
4	140 ft	42,67 m	22	0 ft	0 m
5	130 ft	39,62 m	23	10 ft	3,05 m
6	120 ft	36,58 m	24	20 ft	6,1 m
7	110 ft	33,53 m	25	30 ft	9,14 m
8	100 ft	30,48 m	26	40 ft	12,19 m
9	90 ft	27,43 m	27	50 ft	15,24 m
10	80 ft	24,39 m	28	60 ft	18,29 m
11	70 ft	21,34 m	29	70 ft	21,34 m
12	60 ft	18,29 m	30	80 ft	24,39 m
13	50 ft	15,24 m	31	90 ft	27,43 m
14	40 ft	12,19 m			
15	30 ft	9,14 m			
16	20 ft	6,1 m			
17	10 ft	3,05 m			
18	0 ft	0 m			
19	-10 ft	-3,05 m			
20	-20 ft	-6,1 m			

